


Rubbergeveerde assen ongeremd
Essieux à torsion caoutchouc sans frein
Gummifeder Achsen ungebremst
Rubber suspension axles unbraked

Serie 805
> 25 km/h
300 - 1800 kg

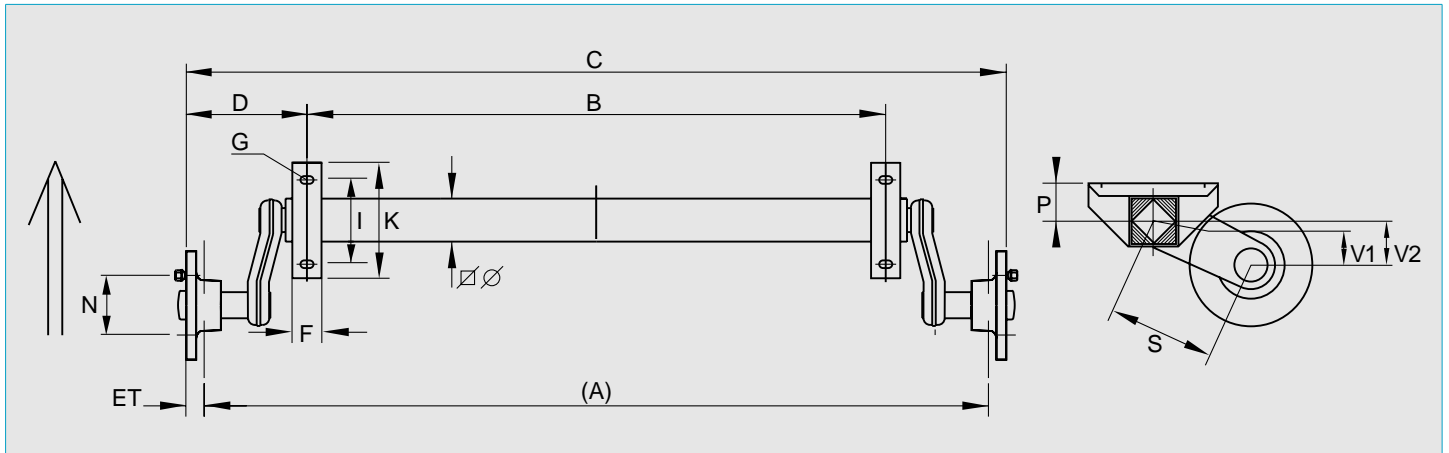

Bestelnummer Numéro de commande Bestellnummer Order number	Max. aslast Charge max. Max. Achslast Max. axle cap. kg.	Asafmetingen Dimensions d'essieux Achsmasse Axle dimensions						Bolling Déport Einpreßtiefe Offset ET	Naafaansluiting Montage sur moyeu Nabenanschluß Hub fitting N	Aspad Bride Auflagebock Bracket				
		(A)	B	C	D	∅	∅			F	G	I	K	P
805.085.090.204	850	1280	900	1350	225	80		26 - 35	57 / 100 / 4	60	13 / 21	160	225	65
805.085.100.204	850	1380	1000	1450	255	80		26 - 35	57 / 100 / 4	60	13 / 21	160	225	65
805.085.100.205	850	1380	1000	1450	255	80		26 - 35	57 / 112 / 5	60	13 / 21	160	225	65
805.085.110.204	850	1480	1100	1550	225	80		26 - 35	57 / 100 / 4	60	13 / 21	160	225	65
805.085.115.214 ●	850	1530	1150	1600	255	80		26 - 35	57 / 100 / 4	60	13 / 21	160	225	65
805.085.120.204	850	1580	1200	1650	255	80		26 - 35	57 / 100 / 4	60	13 / 21	160	225	65
805.085.120.205	850	1580	1200	1650	225	80		26 - 35	57 / 112 / 5	60	13 / 21	160	225	65
805.085.125.204 ●	850	1630	1250	1700	255	80		26 - 35	57 / 100 / 4	60	13 / 21	160	225	65
805.085.130.204	850	1680	1300	1750	255	80		26 - 35	57 / 100 / 4	60	13 / 21	160	225	65
805.085.140.204	850	1780	1400	1850	255	80		26 - 35	57 / 100 / 4	60	13 / 21	160	225	65
805.100.100.205	1050	1380	1000	1450	225	80		26 - 35	57 / 112 / 5	60	13 / 21	160	225	65
805.100.110.204	1050	1480	1100	1550	225	80		26 - 35	57 / 112 / 4	60	13 / 21	160	225	65
805.100.120.205	1050	1580	1200	1650	225	80		26 - 35	57 / 112 / 5	60	13 / 21	160	225	65
805.100.140.205	1050	1780	1400	1850	225	80		26 - 35	57 / 112 / 5	60	13 / 21	160	225	65
805.130.100.205	1350	1380	1000	1450	225	80		26 - 35	57 / 112 / 5	60	13 / 21	160	225	65
805.130.110.205 ●	1350	1480	1100	1550	225	80		26 - 35	57 / 112 / 5	60	13 / 21	160	225	65
805.130.120.205	1350	1580	1200	1650	225	80		26 - 35	57 / 112 / 5	60	13 / 21	160	225	65
805.130.140.205	1350	1780	1400	1850	225	80		26 - 35	57 / 112 / 5	60	13 / 21	160	225	65
805.130.150.205 ●	1350	1880	1500	1950	225	80		26 - 35	57 / 112 / 5	60	13 / 21	160	225	65
805.160.120.205 ●	1600	1580	1200	1650	225		103	26 - 35	57 / 112 / 5	60	18,5 / 21	170	300	60
805.160.140.205 ●	1600	1780	1400	1850	225		103	26 - 35	57 / 112 / 5	60	18,5 / 21	170	300	60

Alle maten in mm.
Tous les mesures en mm.
Alle Maße in mm.
All sizes in mm.

(A)= Indicatie, afhankelijk van ET velg
Indication, dépendant de ET jante
Indikation, abhängig von ET Felge
Indication, dependent on ET rim

V1= Statisch belast
Charge statique
Statische Belastung
Static load

V2= Dynamisch belast
Charge dynamique
Dynamische Belastung
Dynamic load

● Deze artikelen zijn niet uit voorraad leverbaar.
Ces articles ne sont pas livrables de stock.
Diese Artikel sind nicht ab Lager lieferbar.
These articles are not deliverable from stock.